

Solenoid valve

EMVP 8 24V-DC 5/2 IMP

Part no.:10.05.02.00165

<https://www.schmalz.cn/10.05.02.00165>




Home > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Solenoid Valves > Solenoid Valves EMVP > EMVP 8 24V-DC 5/2 IMP

Solenoid valve EMVP for vacuum, pneumatic pilot control



Nominal size: 8 mm
Voltage DC: 24 V - DC
Function: 5/2 multiway valve
Control valve: Impulse valve
Connecting thread: G1/4"-F
Pressure range (operating pressure): -0.95 ... 0.00 bar
Nominal flow rate: 6 m³/h
Weight: 0.27 kg

Design Data

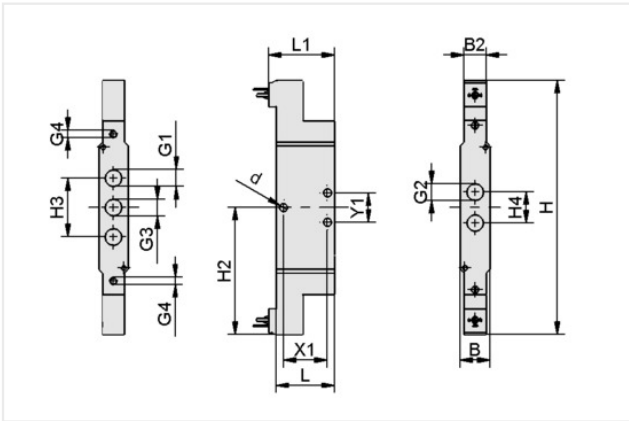

Attribute	Value
B	20 mm
B2	15.20 mm
d	5.50 mm
G1	G1/4"-F
G2	G1/4"-F
G3	G1/4"-F
G4	M5-F
H	172.70 mm
H2	86.30 mm
H3	40 mm
H4	21 mm
L	40 mm
L1	45 mm
X1	30 mm
Y1	20 mm

Technical Data

Attribute	Value
Nominal size	8 mm
Nominal flow rate	6 m³/h

Contact Schmalz

Schmalz (Shanghai) Co. Ltd. | Room 805, Yangguang Plaza, No.777 East GaoKe Road, 201210 Pudong, Shanghai, China
schmalz@schmalz.net.cn

Solenoid valve


EMVP 8 24V-DC 5/2 IMP

Part no.:10.05.02.00165

<https://www.schmalz.cn/10.05.02.00165>

Control valve	Impulse valve
Nominal flow rate	100 l/min
Power consumption DC	3.10 W
Voltage DC	24 V - DC
Closing time	11 ms
Weight	0.27 kg
Product family	EMVP

Accessories

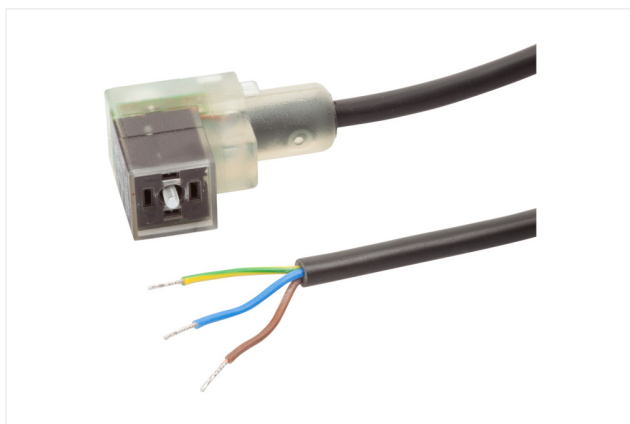

ASK B-Form-C 5000 K-3P

Part no.:21.04.06.00084

Electrical connection: Fem connect Form C

Cable length: 5,000 mm

Material hose: PVC cable

Contact Schmalz

Schmalz (Shanghai) Co. Ltd. | Room 805, Yangguang Plaza, No.777 East GaoKe Road, 201210 Pudong, Shanghai, China
schmalz@schmalz.net.cn